

PRODUCT INFORMATION BULLETIN

FUJICOLOR QuickSnap Panorama & Panorama Flash

1. INTRODUCTION

FUJICOLOR QuickSnap Panorama & Panorama Flash are easy- and comfortable-to-use one-time-use cameras. These models will provide 3 1/2 × 10-inch panorama prints, making them ideal for photographing large groups, expansive scenes and tall structures.

(1) Two-way Electronic Flash Switch for Greater Opportunities

Wider opportunities for flash photography are offered by the Panorama Flash's special feature: a two-way switch that allows selection of regular flash mode or consecutive flash mode.

(2) Compact, Light, Rounded Body

Not only are these models light and small, but their rounded design makes them easier to handle, thus reducing camera movement blur.

(3) ISO 800 Speed Film for Vivid and Sharp Image Quality

These models combine high-speed, fine-grain SUPERIA X-TRA 800 film with a focusing-free, high-performance lens, to produce quality images that are both vivid and sharp.

(4) User-Friendly Design for Easy Handling

Design features for greater ease of use include a lightweight and quiet film winder, battery-level pilot light within the viewfinder, and an easy-to-read film counter. The FUJICOLOR QuickSnap Panorama & Panorama Flash specifications and handling procedures for photofinishers are outlined in the following pages.

2. SPECIFICATIONS

Item	FUJICOLOR QuickSnap Panorama	FUJICOLOR QuickSnap Panorama Flash
• Film	FUJICOLOR SUPERIA X-TRA 800 (ISO 800/30°) 135 12+3 exp. [Image area: 13 mm (H) × 36 mm (W)]	
• Exposures	15	
• Lens	32 mm f/10, focus-free lens	
• Shutter Speed	1/125 sec.	
• Exposure Conditions	Outdoors on sunny or slightly overcast days	Outdoors on sunny or slightly overcast days or whenever flash is required.
• Subject-to-Lens Distance	From 1 m (3.3 ft.) to infinity	
• Finder	Inverted Galilean-type plastic lens finder	
• Flash	————	Built-in electronic flash [Effective subject-to-flash distance: 1 m – 4 m (3.3 ft. – 13.2 ft.)]
• Battery	————	Built-in, irreplaceable
• Size	105 (W) × 54 (H) × 23 (D) mm	
• Weight	61 g	100 g


3. FUJICOLOR SUPERIA X-TRA 800 SPECIFICATIONS AND EDGE MARKINGS

(Specifications)

Item	
• Code	CZ
• Speed	ISO 800/30°
• Type	Daylight
• Process	CN-16/16Q/16FA/16L/ 16S, C-41 or equivalent chemicals
• Size	135 – 12+3 exp.
• Production Number	B51 and above

(Edge Markings)

Size	Item	
135	• Edge Stripe	One green broken line and one red solid line on both sides
	• Type Designation	800
	• Generation Number	CZ-5
	• Latent Image Bar Code	35-1

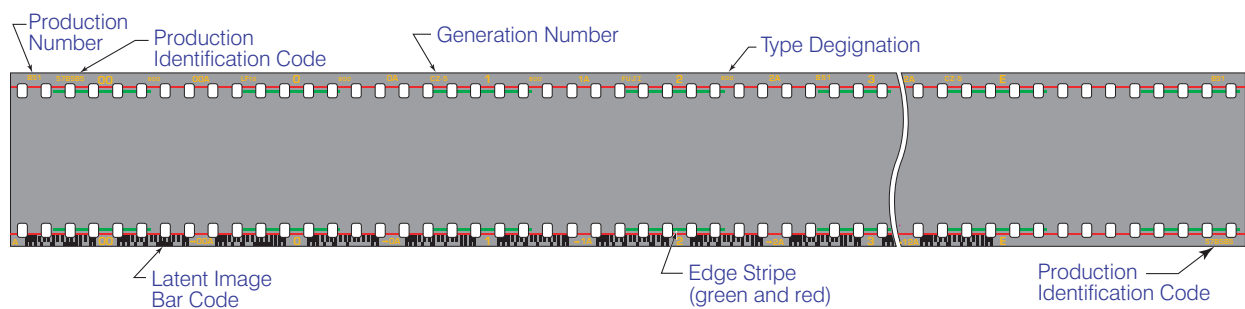

4. HANDLING PROCEDURES FOR LABORATORY PROCESSING

CAUTIONS

- To avoid injury while opening the QuickSnap with a screwdriver or similar tool, do not place your hand in front of the blade.
- Always wear goggles when removing the film cartridge and/or battery because fragments of broken plastic may fly off.
- The electronic flash unit built into the main body works on very high voltages. To avoid suffering electrical shock, do not remove the outer casing, disassemble the body, take out components, or touch the circuit board inside.

4-1 Film Cartridge Removal


Before removing the 35 mm film cartridge, verify that the film has been completely rewound into the cartridge (the exposure counter should indicate "0"). If the film is not completely rewound, take one of the following two courses of action:

- (1) If the last frame (corresponding to "1" in the frame counter window) has been exposed but film has not been advanced yet, wind the film until "0" appears in the frame counter window.
- (2) If more than one exposure remains, cover the lens in a dark location and then keep on pressing the shutter and winding the film until the frame counter window shows "0".

Procedure I

(Fig. 1)


Turn the camera body upside down and insert a 2.5 mm (1/10 in.) screwdriver blade horizontally into the driver insertion point to a depth of about 2 cm (about 4/5 in.), as shown in Fig. 1. Using the screwdriver as a lever, lift up on the outer casing until it tears along the dotted line.

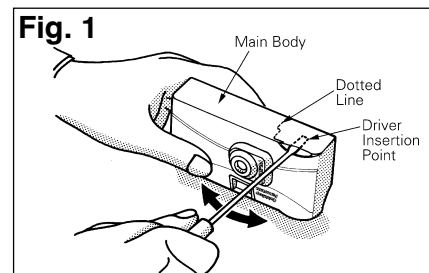

Procedure II

(Fig. 2)


Insert a 2.5 mm (1/10 in.) screwdriver blade about 5 mm (1/5 in.) into the cartridge compartment cover slot as shown in Fig. 2.

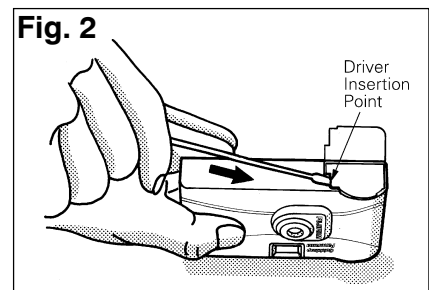

Procedure III

(Fig. 3)


Using the screwdriver as a lever, lift open the cartridge compartment cover. During this procedure be careful not to scratch the battery inside.

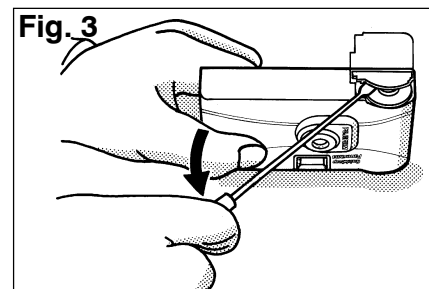

Procedure IV


(Fig. 4)

Turn the camera upside down and allow the cartridge to fall out into the palm of your hand.

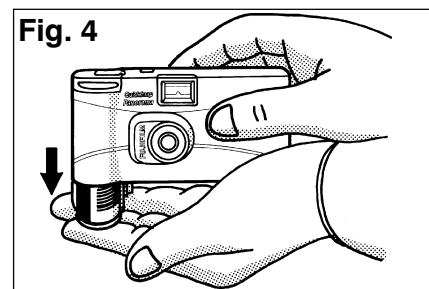

The FUJICOLOR QuickSnap Panorama/Panorama Flash body (manufactured components) can be recycled.

4-2 Film Cartridge Design

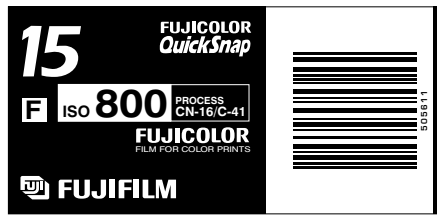


The basic color is green.

5. PROCESSING LABORATORY HANDLING

The procedure for film extraction, cutting and identification label application, and the handling procedures for continuous reel, hanger and Minilab processing are basically the same as those for the current QuickSnap SUPERIA. Make sure, however, that the film extraction length, leading end cut length, and identification label position conform to the specifications indicated in the following figure:

- ① 120 mm (4 ³/₄ in.) or 26 perforations (max.)
- ② Leading end length
- ③ Film extraction length
- ④ Identification label position
- ⑤ Cut location

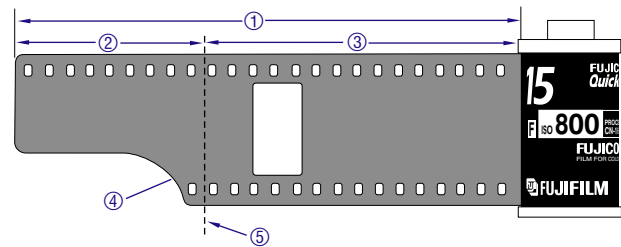

Together, the film extraction length and leading end length should not total more than 120 mm (4 ³/₄ in.).

6. PROCESSING AND PRINTING CONDITIONS

(1) Processing Conditions

Process the film with CN-16, CN-16Q, CN-16FA, CN-16L, CN-16S, C-41 or equivalent processing chemicals.

(2) Automatic Printer Conditions

Use the same channel settings as for SUPERIA X-TRA 800.

8. PARTS RECYCLING

In line with Fujifilm's efforts to protect the environment, photofinishers are kindly urged to send the used camera bodies to Fujifilm for recycling.

NOTICE The data herein published were derived from materials taken from general production runs. However, as Fujifilm is constantly upgrading the quality of its products, changes in specifications may occur without prior notice.



FUJI PHOTO FILM CO., LTD.

26-30, Nishiazabu 2-chome, Minato-ku, Tokyo 106-8620, Japan